


Protective Relay Test

Mimic Breaker: Model TZ-110BD

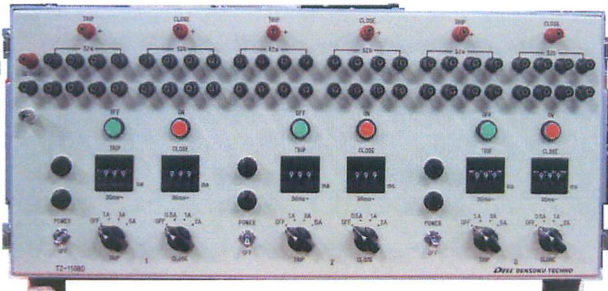

Model TZ-110BD
550×470×270(H) mm, 24 kg

When testing a relaying system, a real circuit breaker in the relaying system under test is replaced with MIMIC BREAKER Model TZ-110B to make equivalent circuit without the real circuit breaker, and the test including the trip and close actions for circuit breaker can be carried on efficiently.

Rating

Power requirement	DC 110 V
Working voltage	DC 110 V
Trip current	1, 3, 5 A
Resetting current	0.5, 1, 2 A
Operating time	30–150 ms adjustable
Resetting time	50–500 ms adjustable
Contact	DC 110 V/3 A
Contact circuit*	3 circuits

*One circuit including 4 of make-contacts and 4 of break-contacts.